


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/6/21	PHOSPODAR

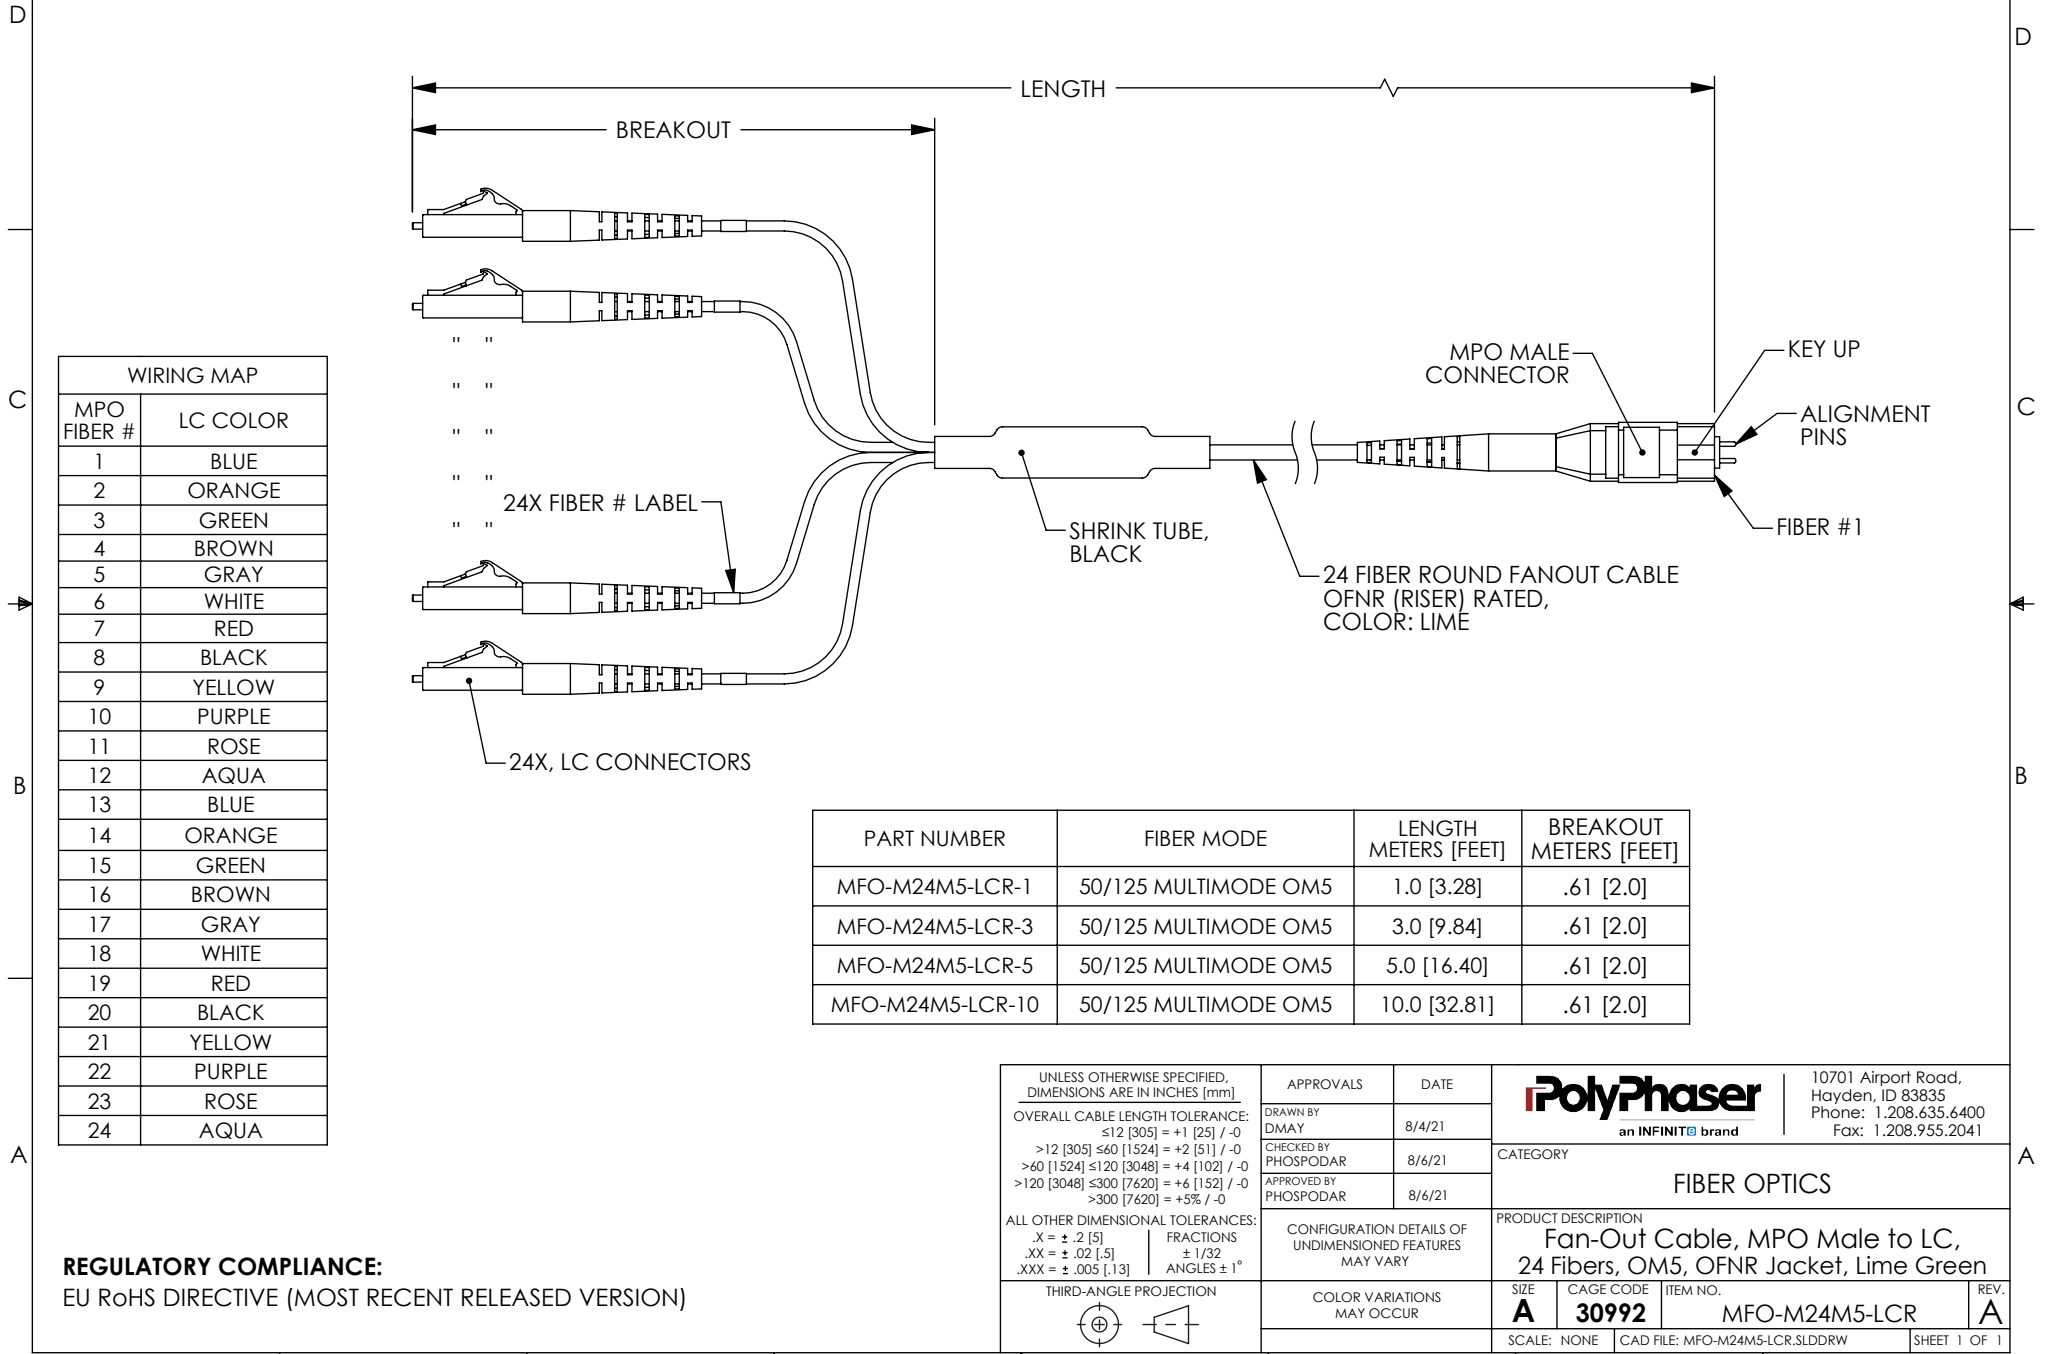

WIRING MAP	
MPO FIBER #	LC COLOR
1	BLUE
2	ORANGE
3	GREEN
4	BROWN
5	GRAY
6	WHITE
7	RED
8	BLACK
9	YELLOW
10	PURPLE
11	ROSE
12	AQUA
13	BLUE
14	ORANGE
15	GREEN
16	BROWN
17	GRAY
18	WHITE
19	RED
20	BLACK
21	YELLOW
22	PURPLE
23	ROSE
24	AQUA

PART NUMBER	FIBER MODE	LENGTH METERS [FEET]	BREAKOUT METERS [FEET]
MFO-M24M5-LCR-1	50/125 MULTIMODE OM5	1.0 [3.28]	.61 [2.0]
MFO-M24M5-LCR-3	50/125 MULTIMODE OM5	3.0 [9.84]	.61 [2.0]
MFO-M24M5-LCR-5	50/125 MULTIMODE OM5	5.0 [16.40]	.61 [2.0]
MFO-M24M5-LCR-10	50/125 MULTIMODE OM5	10.0 [32.81]	.61 [2.0]

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [13] THIRD-ANGLE PROJECTION	APPROVALS		DATE	
	DRAWN BY DMAY		8/4/21	
	CHECKED BY PHOSPODAR		8/6/21	
	APPROVED BY PHOSPODAR		8/6/21	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR		CATEGORY FIBER OPTICS	
PRODUCT DESCRIPTION Fan-Out Cable, MPO Male to LC, 24 Fibers, OM5, OFNR Jacket, Lime Green		SIZE A	CAGE CODE 30992	ITEM NO. MFO-M24M5-LCR
SCALE: NONE		CAD FILE: MFO-M24M5-LCR.SLDDRW		REV. A

10701 Airport Road,
Hayden, ID 83835
Phone: 1.208.635.6400
Fax: 1.208.955.2041

PolyPhaser
an INFINITI brand